

Military Amplified 1X4 GPS Splitter Technical Product Data

Features

- Precise Amplitude Balance
 - Less than 1 dB variation between ports.
- Flat Group Delay
 - Less than 1ns variation between L1 and L2.
- High Output Gain
 - 18.5 dB gain is typical across all operating frequencies.
- Wide Accepted Frequency Range
 - Accepts signals from the entire L-Band, covering all major GNSS constellations.
- Efficiently Blocked Ports
 - o Uses 200Ω resistors to prevent antenna alarm faults from connected devices.
- Matched Phase Balance
 - Less than 4° of variation between ports.
- Qualification and Test Reports Available



Description

This **Mil**itary Qualified **A**mplified **L**oaded **DC B**locked **S**plitter **1X4 (MIL-ALDCBS1X4)** is an active one input, four output RF splitter that splits signals from 1.1 GHz to 1.7 GHz. This equipment is designed to amplify and split signals within the L-band to provide multiple devices with the signal from a single antenna. In the standard configuration, the J1 port will pass DC voltage from a connected device and pass this power to the antenna or other devices upline from the splitter via the antenna port. The other ports (J2-J4) are DC blocked and loaded with 200Ω resistors to simulate antenna current draw which prevents antenna alarm faults. All MIL-Spec splitters are qualified to the rigorous MIL-STD 810F environmental & MIL-STD-461F EMI standards. Custom gain, DC power, and connector configuration are available upon request.

Use Cases

- Splitting and amplifying a roof antenna signal between 4 GPS/GLONASS/GNSS receivers.
- Splitting and amplifying WAAS antenna between WAAS receiver, ADS-B, and 2 other devices.
- Splitting and amplifying an antenna signal to 4 passive antennas to re-radiate 4 spaces.
- Usable as a small part of a larger signal distribution network.



Electrical Specifications, TA=25°C

General Specification

<u>Parameter</u>	<u>Notes</u>	<u>Min</u>	Тур	Max	<u>Unit</u>
Frequency Range	Covers all major GNSS constellations.			1.7	GHz
Characteristic Impedance	Unused ports should be terminated with 50Ω loads.		50		Ω
Current Draw	Typical current consumption.		17		mA
Input P1dB	The 1dB compression point.		-24		dBm
Req. DC Input V.	Operating voltage range for non-networked units.	3.3		15	VDC

GPS L1 & L2 RF Specification (1)

<u>Parameter</u>	<u>Notes</u>	<u>Min</u>	Тур	<u>Max</u>	<u>Unit</u>
Gain	The relative increase in signal power provided by the amplifier.	17	18.5	20	dB
Input SWR	Input Standing Wave Ratio: S11			2.0:1	-
Output SWR	Output Standing Wave Ratio: S22			2.0:1	-
Noise Figure	The increase in noise power relative to an ideal amplifier.		L1:2.5 L2:5.5	L1:2.75 L2:6.00	dB
Gain Flatness	The difference in loss or gain between the L1 and L2 frequencies.		0.5	1.0	dB
Amplitude Balance	The difference in gain or loss between each output port.		0.5	1.0	dB
Phase Balance	The difference in phase variation between each output port.			4.0	deg
Isolation	The amount of attenuation between two output ports.	L2:22 L1:24			dB
Group delay flatness	The difference in signal delay between the L1 and L2 frequencies.		0.25	1.0	ns


(1): Performance is slightly reduced around GPS L5. If working on sensitive L5 applications, please request performance data.

External Power Options (Networked Option)							
Source Voltage Options	Voltage Input	Style					
	110VAC	Transformer (ITA Type A Wall Mount)					
	220VAC	Transformer (ITA Type C Wall Mount)					
	240VAC (United Kingdom)	Transformer (ITA Type G Wall Mount)					
	Customer Supplied DC 9-32 VDC	MIL-DTL-5015 10SL DC Connector (Includes Mate)					
	DC Voltage Out	Max Current out For Corresponding Vout					
	3.3 V	110mA					
	5V	130mA					
Output Voltage Options (2)	9V	140mA					
Output Voltage Options	12V	180mA					
	15V	220mA					
	Custom	Custom					
Standard DC Configuration without External Power Option							
J1/Outp	ut 1 Pass DC, J2-J4/Output 2-4 Block DC, Input	Pass DC					
Standard DC Configuration with any External Power Option (AC/DC or Military DC)							
All Outputs DC Blocked with 200Ω load standard							
Any port can be custom selected to Pass or Block DC							
	Connector Style	Charge					
	Type N-female	No Charge					
Connector Ontions	Type SMA-female	No Charge					
Connector Options	Type TNC-female	No Charge					
	Type BNC-female	No Charge					
	Other	Contact GPS Networking					

(2):With Network Option, any RF port (input or output) can be specified to Pass DC or Block DC



Part Number Configuration

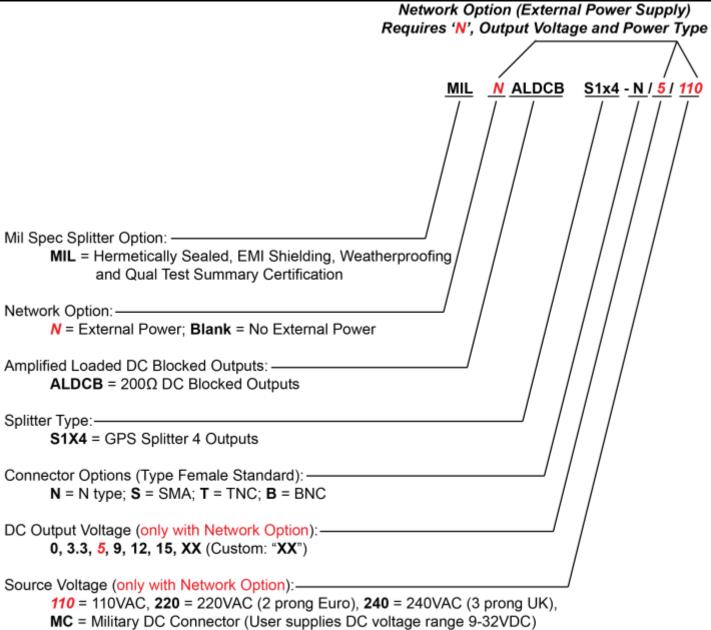

(Military DC Mating Connector is included standard with the MC power option).

When no external power supply option (AC or DC) is selected, Output 1/J1 is Pass DC Standard. When external power supply option is selected, all outputs are DC blocked standard.

Contact GPS Networking Technical Support at 1-800-463-3063 or salestech@gpsnetworking.com for any questions regarding non-standard configurations and corresponding part numbers.



Performance

MIL-ALDCBS1X4 (Standard Gain, typical)

Each MIL-ALDCBS1X4 ships with a test sheet that verifies critical performance characteristics, such as gain, input VSWR, and amplitude balance; a typical VNA test sheet is shown below.



